


Automatic Rotary Bag Supplying-Filling Machine

FR-2

This upgraded model offers flexibility and variety in packaging at a higher production speed.



3-side sealed bag





Doy pack & Stand Up Pouch with/without Zip



Back Line Sealed Bag



Gusset with/without Zip

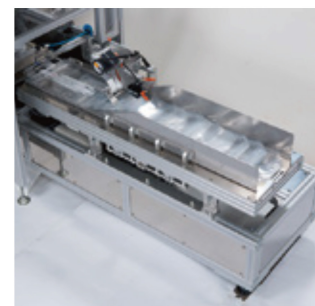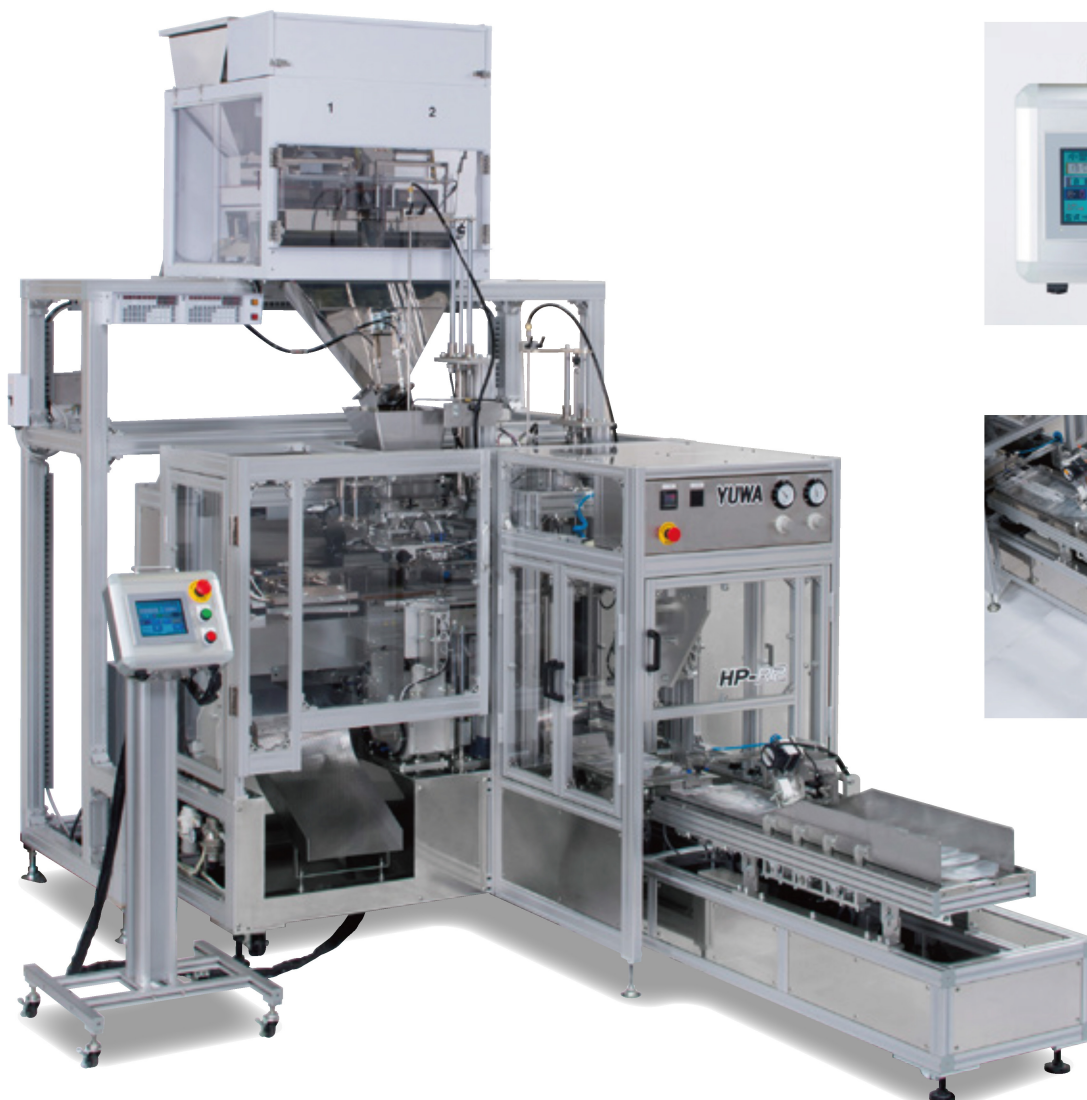

with Weigher (Optional)

Specifications

Bag Size	Min. Bag Size (Width)	Gusset 55 mm / Flat 90 mm
	Min. Bag Size (Length)	150 mm
	Max. Bag Size (Width)	150 mm
	Max. Bag Size (Length)	310 mm (Option: 420 mm)
Capacity	12–15 bags/min. * Depends on material and package type / size.	
Packaging Method	Heat sealing	
Dimensions	1,600 (W) x 1,650 (D) x 1,960 (H)	
Weight	750 kg (Main Body)	
Power Supply *	3-Phase / 200 V / 2.2 kW	
Compressed Air *	460 L/min.	
CE Marking **	Not Available	

* Transformer for local voltage and dried compressed air to be prepared by the customer.

** Fail-safe design based on CE directive.

Option

- Weigher
- Optional device for gusset bag
- Decompression device
- Dust collection device
- Date printer
- Discharge device
- Zip opening device
- Material feeding lifter

Layout

