

Overwrapping Machine for Triangular Tea Bags with Nitrogen Gas Filling for Freshness


FT-II

Over-wrapping machine with flexibility and options.


- Over-wrapping function: This machine is designed to pack one triangular tea bag into an individual overwrap.
- For stand-alone usage, insert tea bag by hand, feeder (optional), or interlocked with a tea bag packaging machine. (ex. FP-50S, FP-CS etc.)
- Nitrogen gas-filling prevents oxidation. Every single sachet can keep the taste and aroma fresh right before drinking.
- Capacity up to 50 bags/min.



Easy operation
with a wealth of information



Twin conveyor that delivers
high capacity



Thermal date printer (optional)

Specifications

Packaging Method	3-Side Heat Sealing
Packaging Materials	Laminated Film (PP, PE, etc.)
Film Width	160–200 mm
Bag Size	80–100 (W) x 80–115 (L) mm
Capacity	Max. 50 bags/min.
Dimensions	2,140 (W) x 1,160 (D) x 1,495 (H) mm
Weight	500 kg
Power Supply *	3-Phase / 200 V / 2.5 kW
Compressed Air *	350 L/min. (6 bar)
CE Marking **	Optional

* Transformer for local voltage and dried compressed air to be prepared by the customer.


** Fail-safe design based on CE directive.

Option

- Interlock Function with Tea Bag Packaging Machine
- Interlock Lifter (FK-1)
- Dust Collection Device
- Bitten Bag Detector
- Date Printer

Layout

■ FT-II (Stand-Alone)

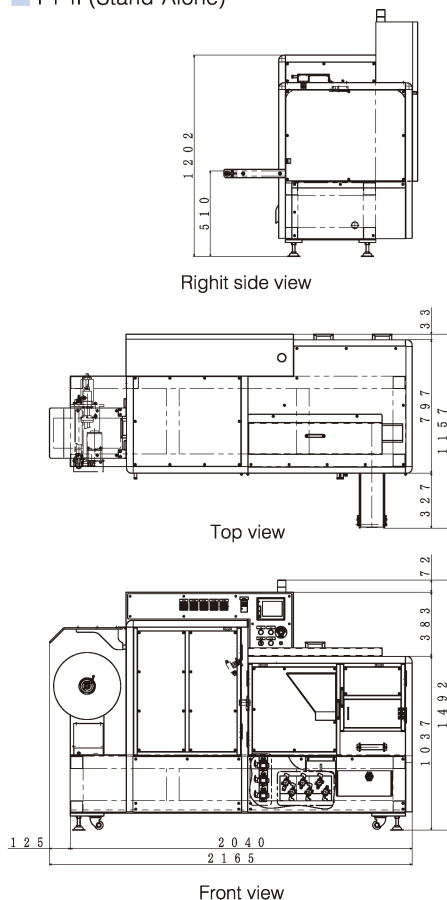

■ FT-II + Lifter + tea bag packaging machine with Load-Cell Weigher

